

Product tear sheet

PUFFY formed PET acoustic workstation screen and modesty panel

available in 2 sizes and 3 colours

Lead time: stocked

Origin: China


Fire Rating: AS 5637.1:2015 group 1



Hot compression mould method is used to achieve stiff 17mm thick pre-formed workstation screens, that are cost effective and easy to install.

Subtle touch of relief design adds interest but does not allow itself to interfere with surrounding interior.

Post-consumer PET fibre is dyed and compressed to achieve this result using our unique moulds.



BZ11



BZ03





BZ12

All sizes shown in millimetres, colour variation of approx. 5% between batches may occur



Product tear sheet

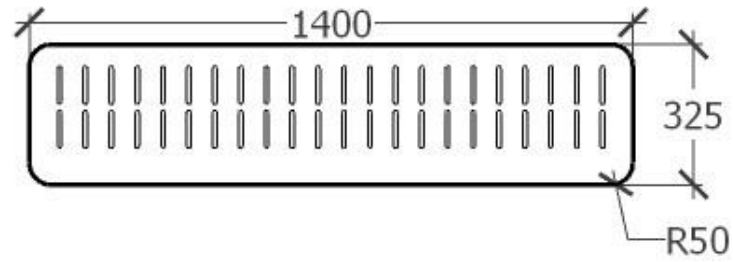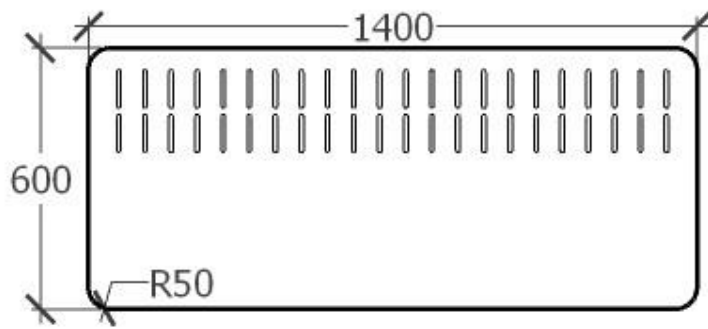

Flame Retardant: EN 13501

Acoustics: EN ISO 354:2003

Weight Range: 1300g/m²-3500g/m²

Eco-friendly: AS/NZS 4266 recycled PET staple fibre, with no chemical irritants, free of harmful substances

